




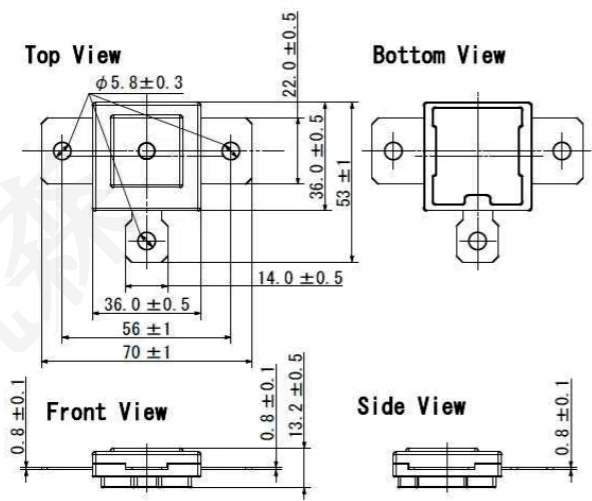

熔断电阻器 BW >>>>

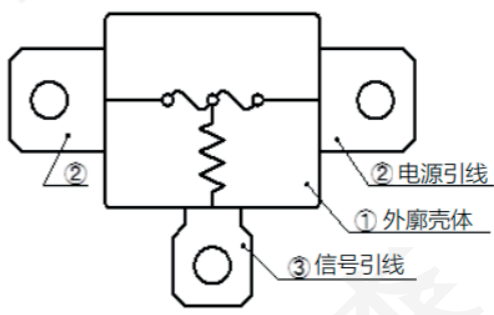

BW12

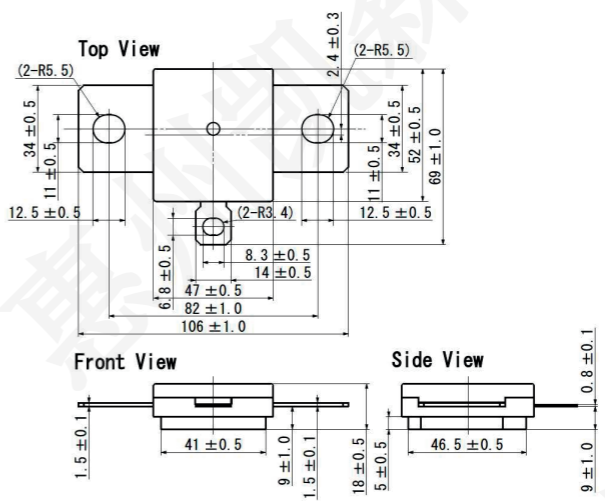

BW21

型号		BW12/5R1	BW12/120	BW12/220	BW12/430	BW21/R65	BW21/7R8	BW21/10R1
保险丝部 额定	额定电流	265A				480A		
	额定电压	DC140V				DC140V		
	可遮断范围	DC84V,265A~DC140V,48A				DC73V,480A~DC140V,63A		
	保险丝部电阻	0.10mΩ 以下				0.05mΩ 以下		
熔断电阻 器部额定	动作电压范围	20~30V	31~46V	42~62V	58~88V	13~15V	45~51V	46~58V
	电阻值及电阻公差	5.1Ω±5%	12Ω±5%	22Ω±5%	43Ω±5%	0.65Ω±5%	7.8Ω±5%	10.1Ω±5%
	额定功率	4W				20W		
遮断后各端子间的绝缘电阻		2,000MΩ 以上				2,000MΩ 以上		
遮断后各端子间的耐电压		AC1,000V				AC1,000V		
安规		UL1412(UL File No:E106175)				UL1412 预定取得		